

Provide instant connectivity and immediate accessibility to data and charging while eliminating all desktop cables

ergoCentric^{*}

Zdock






Easily retrofits at any time and available as a standalone



Type-C, backwards compatible with USB 3.0 is perfect for transitioning from USB 3.0 to Type-C in agile work environments



Zdock

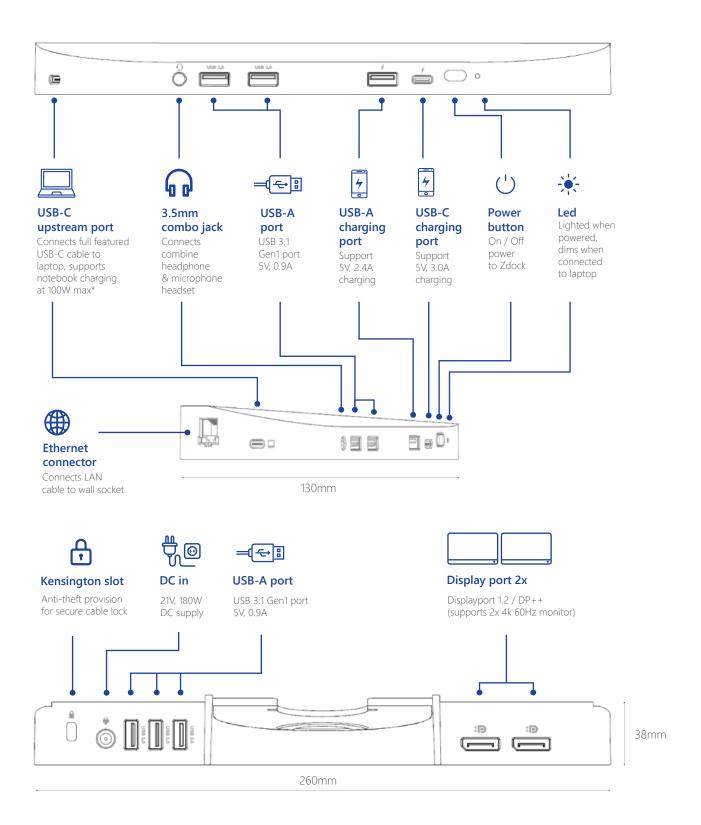

^{*} Important: Only use USB-C cable provided with unit, other cables may void product warranty.

Specifications

Zdock

USB port (upstream)	USB-C full feature with 100W PD charging Support PD2.0 version 1.2
USB port (downstream)	2x USB-A 3.1 Gen1 (5V, 0.9A max)
USB charging ports (no data)	USB-C (5V, 3.0A max) USB-A (5V, 2.4A max)
Microphone / headphone	TRRS 3.5mm combo jack for Apple / Samsung type
Video output	2x DP++ (dual mode DP1.2) Support: 5k - 5120x2880p60 (only 1 video connection) 4k - 3840x2160p60, 4096x2160p60 2k - 2560x1600p60, 2560x1440p60 1k - 1920x1080p60
Network	Gigabit ethernet Transfer rate 10Mbit / 100Mbit / 1Gbit
Back USB port (downstream)	3x USB-A 3.1 Gen1 (5V, 0.9A)
Operating system	Windows 7 and above Apple OS X version 10.8.3 and above
Temperature	Operating: 0°C to 40°C Non operating: -20°C to 60°C
Relative Humidity	Operating: 10% to 80% (non-condensing 5 to 35°C) Non operating: 5% to 90% (non-condensing -20 to 60°C)
Altitude	Operating: sea level to 5000m Non operating: 5000m
Compliance	Designed to meet RoHS and WEEE directives
Weight	2kg box packed
AC power adapter	Input voltage: 90–264V (47–63Hz) Output voltage: 20V (+/- 5%), 7.5A, 150W Efficiency: meets US DoE VI Mainscord: Mickey Mouse (IEC60320-C5), 1.8m
Accessories	1x USB-C full feature cable, 1.0m with USB-C to USB-A adapter

Standard colors:



White



Silver



Ph: 1866 GET ERGO | 905 696-6800 Fx: 1800848-5190 | 905696-0899

orders@ergocentric.com

